


Floor-standing type air cooler


低温蒸发器

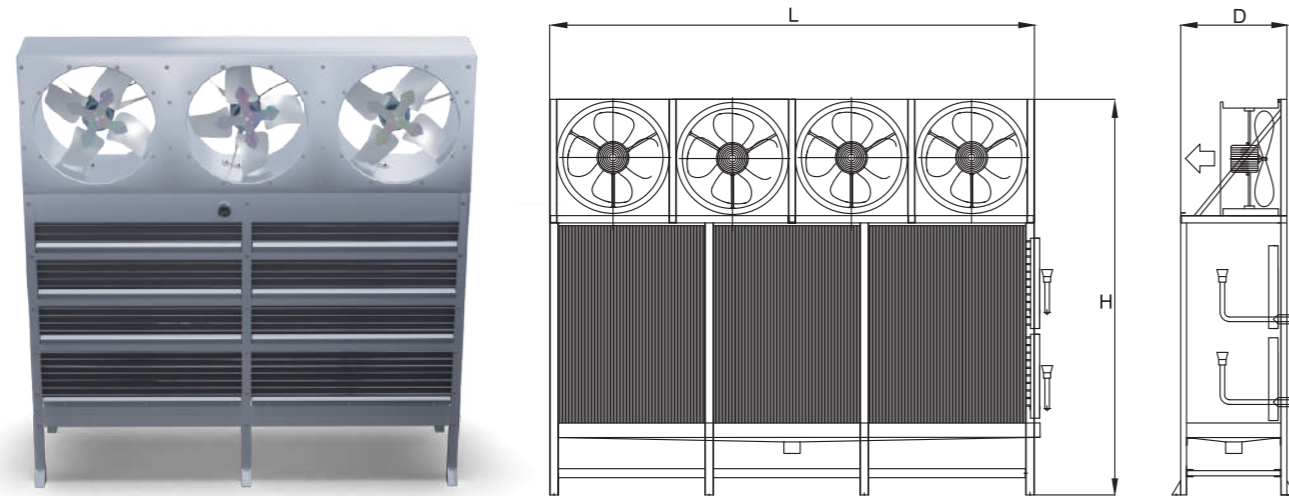

低温蒸发器翅片间距 9mm
Low temperature evaporator fin space 9mm

型号 Model		DJL-200	DJL-240	DJL-300	DJL-350	DJL-400	DJL-470	DJL-540	DJL-600	DJL-730
制冷量 Cooling capacity	SC3 R404A	KW 34.70	40.80	53.10	62.30	70.40	82.10	93.70	105.4	128.5
	R22	KW 34.10	40.00	52.00	60.90	69.40	80.60	91.60	102.4	125.8
风量 Air Flow		m³/h 24000	30000	42000	42000	48000	48000	72000	69400	86000
送风距离 Air flow range		m 20	20	20	20	20	20	25	25	25
局外静压 External pressure		Pa 90	90	90	90	90	90	90	100	120
噪音 Noise level		db(A) 75	75	75	77	77	77	78	80	80
风扇 Fan		NO. × Φ 3 × 550	3 × 600	3 × 700	3 × 700	4 × 700	4 × 700	3 × 800	3 × 800	4 × 800
风扇电机 Fan Motor		W 3 × 750	3 × 1500	3 × 2200	3 × 2200	4 × 2200	4 × 2200	3 × 4000	3 × 4000	4 × 4000
水化霜 Water Defrost	进水管 Inlet pipe	inch 1-G2"	1-G2"	1-G2"	1-G2"	2-G1.5"	2-G1.5"	2-2G"	2-2G"	2-G2"
	排水口 Drainage outlet	inch 1-G4"	1-G4"	1-G4"	1-G4"	1-G4"	1-G4"	2-4G"	2-4G"	2-G4"
尺寸 Dimensions	L	mm 2295	2500	2700	2800	3490	3490	3600	3600	4200
	H	mm 2465	2465	2655	2655	2845	2845	3434	3434	3434
	D	mm 796	796	796	796	796	796	1050	1050	1050
重量 Weight		kg 280	310	410	455	680	740	820	910	1180
连接处尺寸 Connection pipe	进口直径 Inlet Φ	mm 25 × 1	25 × 2	25 × 2	25 × 2	25 × 2	25 × 2	25 × 2	22 × 3	22 × 3
	出口直径 Outlet Φ	mm 50	50 × 2	54 × 2	54 × 2	54 × 2	54 × 2	54 × 2	54 × 3	54 × 3

FNH型冷凝器技术参数 Technical data of FNH type condenser

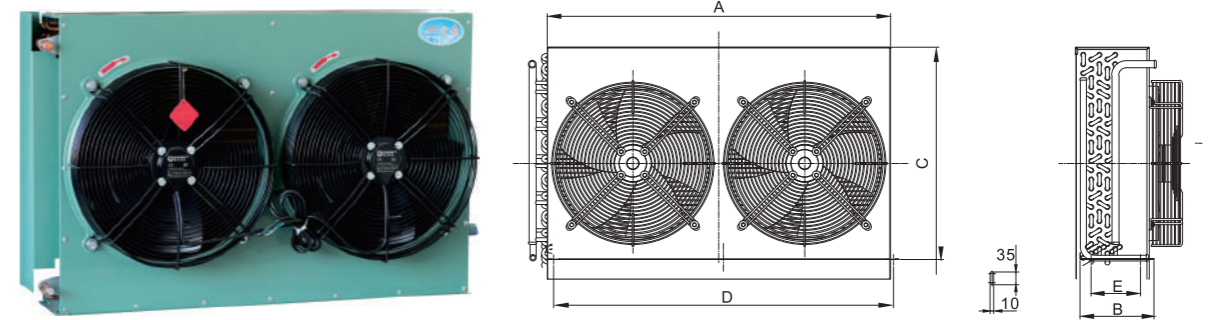

风冷冷凝器型号说明 Description of air-cooled condenser

- 49** 换热面积m² Heat exchange area(m2)
- 14.8** 换热量KW Heat exchange capacity(KW)
- G** G表示谷轮半封闭式 Gstand for semi-closed copeland
- H** H表示平板式侧出风式, V表示V型顶出风式, U表示U型顶出风, W表示W型顶出风
Hstands for flat type (side air flow),V stands for V type(V top air flow) U stands for U type(U top air flow),W stands for W type(W top air flow)
- FN** 产品代号 Series code

型号 Model	换热量 Heat exchange capacity (KW)	排环数 Number of coils	换热面积 Heat exchange area(m²)	风机 Fan				接口管径 Diameter of connection pipe(mm)		外形尺寸 Dimension(mm) A × B × C	安装尺寸 Installation dimension(mm)	
				功率 Power W	直径 Φ Diameter	风量 Air flow(m³/h)	电压 V Voltage	进管 Inlet	出管 Outlet		D	E
FNH-0.6/2.1	0.6	2 × 4	2.1	1*35	Φ200	430	220	10	10	280 × 120 × 240	280	60
FNH-1.0/3.4	1	3 × 4	3.4	1*35	Φ200	430	220	10	10	280 × 120 × 240	280	60
FNH-1.5/5.0	1.5	3 × 5	5	1*60	Φ250	910	220	10	10	325 × 120 × 290	325	60
FNH-1.7/5.7	1.7	3 × 6	5.7	1*100	Φ300	1950	220	10	10	370 × 130 × 340	370	70
FNH-2.2/8	2.2	4 × 6	8	1*100	Φ300	1950	220	12	12	370 × 150 × 340	370	90
FNH-3.5/12	3.5	4 × 8	12	1*180	Φ350	2700	220/380	16	16	430 × 180 × 430	420	120
FNH-4.4/15	4.4	4 × 9	15	1*180	Φ350	2700	220/380	16	16	480 × 180 × 480	470	120
FNH-5.4/18	5.4	4 × 10	18	1*230	Φ400	4000	220/380	16	16	520 × 180 × 530	510	120
FNH-6.7/22A	6.7	5 × 10	22	1*230	Φ400	4000	220/380	16	16	520 × 200 × 530	510	140
FNH-6.7/22B	6.7	4 × 8	22	2*180	Φ350	2*2700	220/380	16	16	820 × 180 × 430	805	120
FNH-8.3/28	8.3	4 × 9	28	2*180	Φ350	2*2700	380	16	16	880 × 180 × 480	865	120
FNH-9.8/33	9.8	4 × 10	33	2*230	Φ400	2*4000	380	16	16	930 × 180 × 530	915	120
FNH-12.5/41	12.5	4 × 12	41	2*230	Φ400	2*4000	380	19	16	930 × 180 × 630	915	120
FNH-14.8/49	14.8	5 × 12	49	2*230	Φ400	2*4000	380	19	16	930 × 200 × 630	915	140
FNH-16/55	16	4 × 14	55	2*230	Φ400	2*4000	380	19	16	1100 × 200 × 730	1085	140
FNH-17/60	17	4 × 14	60	2*280	Φ450	2*4700	380	19	16	1140 × 200 × 730	1125	140
FNH-20/70	20	4 × 18	70	4*180	Φ350	4*2700	380	25	19	1140 × 200 × 930	1125	140
FNH-23/80	23	4 × 20	80	4*230	Φ400	4*4000	380	25	19	1140 × 200 × 1030	1125	140
FNH-29/100	29	5 × 20	100	4*230	Φ400	4*4000	380	25	19	1140 × 200 × 1030	1125	140
FNH-32/110	32	5 × 22	110	4*230	Φ400	4*4000	380	32	19	1140 × 200 × 1130	1125	140
FNH-35/120	35	5 × 24	120	4*230	Φ400	4*4000	380	32	19	1140 × 200 × 1230	1125	140
FNH-41/140	41	5 × 26	140	4*280	Φ450	4*4700	380	32	19	1180 × 220 × 1330	1165	160
FNH-43.5/150	43.5	5 × 24	150	4*280	Φ450	4*4700	380	32	25	1350 × 240 × 1230	1335	180
FNH-46.4/160	46.4	5 × 24	160	4*460	Φ500	4*6640	380	32	25	1450 × 240 × 1230	1435	180
FNH-52.2/180	52.2	6 × 24	180	4*460	Φ500	4*6640	380	35	25	1450 × 240 × 1230	1435	180
FNH-58/200	58	6 × 24	200	4*460	Φ500	4*6640	380	35	25	1500 × 240 × 1230	1485	180